- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 95%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- · Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 5 years warranty (Note.10)



Blank: IP67 rated. Cable for I/O connection.


- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal

#### CDECIEIC ATION


MODEL		HB-320-12	HB-320-15	HB-320-20	HB-320-24	HB-320-30	HB-320-36	HB-320-42	HB-320-48	HB-320-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V			
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A			
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W			
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p			
OUTPUT	VOLTAGE ADJ. RANGE Note.6			17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V			
				potentiometer /	A type and C ty	pe only							
	CURRENT ADJ. RANGE	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A		5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95			
	VOLTAGE TOLERANCE Note.3	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.8	2500ms, 80ms at full load 230VAC /115VAC											
	HOLD UP TIME (Typ.)	15ms at full load 230VAC /115VAC											
		90 ~ 305VAC 127 ~ 431VDC											
INPUT	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%			
	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%			
	AC CURRENT (Typ.)	3.5A / 115VAC 1.65A / 230VAC 1.45A / 277VAC											
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010 \( \mu \) measured at 50%  peak) at 230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
	LEMINIGE COMMENT	95~108%											
	OVER CURRENT Note.4	Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	CHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed.											
PROTECTION	SHORT CIRCUIT	14 ~ 17V	17.5 ~ 21V	22.5 ~ 27V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V				
PROTECTION	OVER VOLTAGE				27 ~ 33V			40.0 000	33.3 00 V	00 00V			
		Protection type: Shut down and latch off o/p voltage, re-power on to recover  100°C ±10°C (RTH2)											
	OVER TEMPERATURE	Protection type: Shut down and latch off o/p voltage, re-power on to recover											
	IMORIVING TEMP	Protection type: Shut down and latch on o/p voltage, re-power on to recover  -40 ~ +70℃ (Refer to "Derating Curve")											
	WORKING TEMP.		non-condensir										
	WORKING HUMIDITY			ig									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,											
	TEMP. COEFFICIENT	±0.03%/℃ (0				V V 7							
	VIBRATION				72min. each ald	•							
	SAFETY STANDARDS Note.7	1			I7-1, EN61347-		ent,IP65 or IP6	67, J61347-1,					
				<u> </u>	60950-1, TUV I								
SAFETY &	WITHSTAND VOLTAGE				/P-FG:0.5KVA								
EMC	ISOLATION RESISTANCE	,			00VDC / 25°C /								
	EMC EMISSION				R22) Class B, E								
	EMC IMMUNITY	Compliance to	EN61000-4-2	2,3,4,5,6,8,11,	EN61547, EN5	5024, light indu	ustry level (sur	ge 4KV), criter	ia B				
	MTBF	157.1K hrs min. MIL-HDBK-217F (25°C)											
OTHERS	DIMENSION	252*90*43.8mm (L*W*H)											
	PACKING	1.88Kg; 8pcs/16Kg/0.92CUFT											
NOTE	Ripple & noise are measure     Tolerance : includes set up     Constant current operation reconfirm special electrical reconfirm.	y mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  tolerance, line regulation and load regulation.  egion is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please equirements for some specific system design.  der low input voltages. Please check the static characteristics for more details.											

- 6. A type and C type only.
  7. Safety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18.
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
- The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

10. Refer to warranty statement.

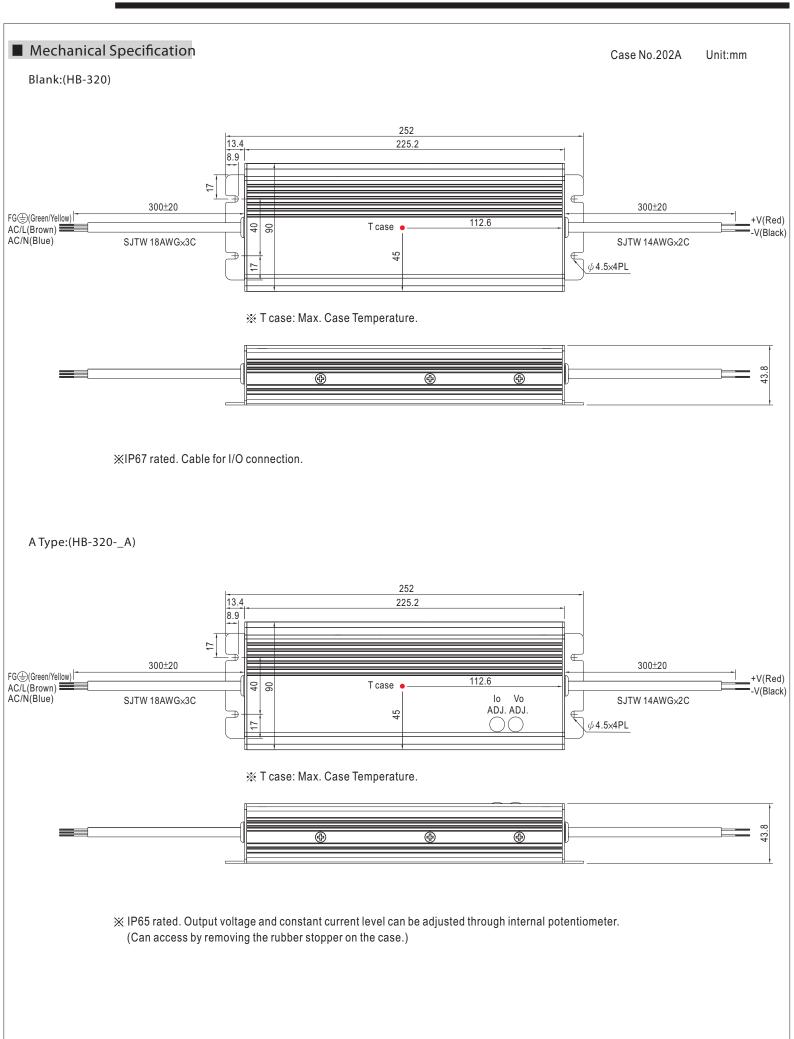



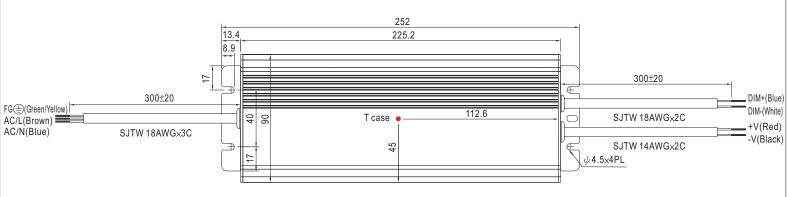


※ T case: Max. Case Temperature.

320W Single Output Switching Power Supply



## C Type:(HB-320-\_C)

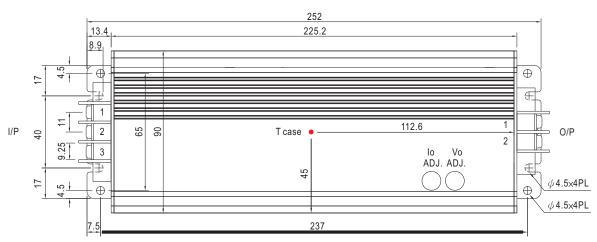

X T case: Max. Case Temperature.




X Output voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)

## AC Input Terminal Pin No. Assignment


Pin No.	Assignment
1	FG ±
2	AC/L
3	AC/N

DC Output Terminal Pin No. Assignment

Pin No.	Assignment
1	+V
2	-V

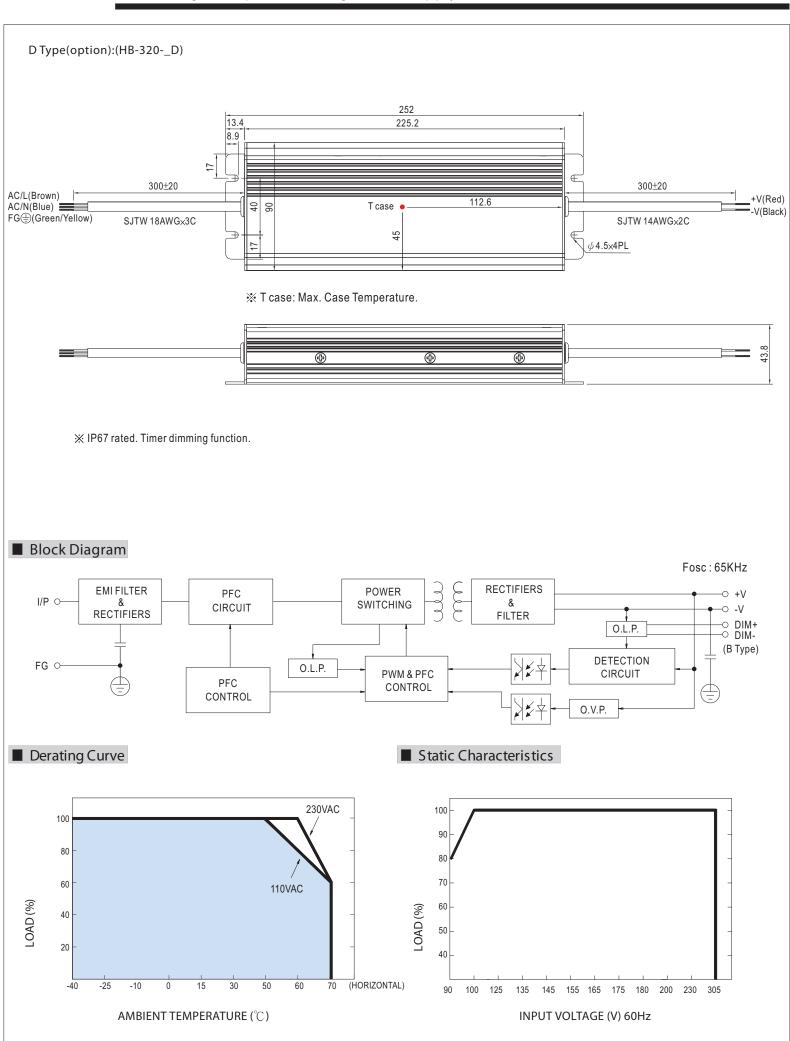


# ■ Power Factor Characteristic

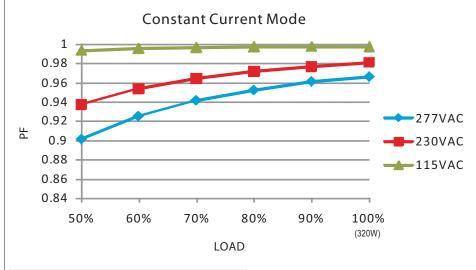

# ■ EFFICIENCY vs LOAD (48V Model)

HB-320 series possess superior working efficiency that up to 95% can be reached in field applications.

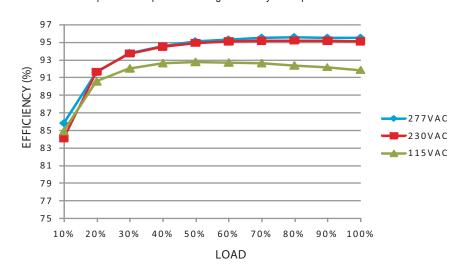


## ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".


A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

LED & LED's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B)

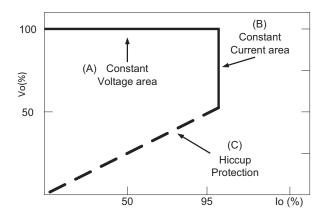

Typical LED power supply I-V curve

# ■ DIMMING OPERATION (for B-type only)

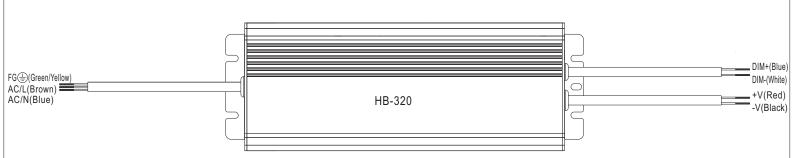

- X Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	<b>10K</b> Ω	<b>20K</b> Ω	30K $Ω$	<b>40K</b> Ω	50K $Ω$	<b>60K</b> Ω	<b>70K</b> Ω	<b>80K</b> Ω	<b>90K</b> Ω	100K $\Omega$	OPEN
	l Multiple drivers - I	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

#### 


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

#### \* 10V PWM signal for output current adjustment (Typical): Frequency range:100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- \*Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

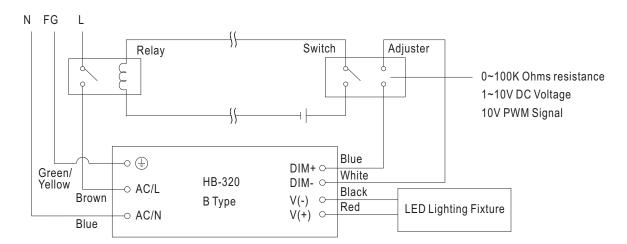


Using a switch and relay can turn ON/OFF the lighting fixture.

- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.


## ■ WATERPROOF CONNECTION

Waterproof connector

Waterproof connector can be assembled on the output cable of HB-320 to operate in dry/wet/damp or outdoor environment.

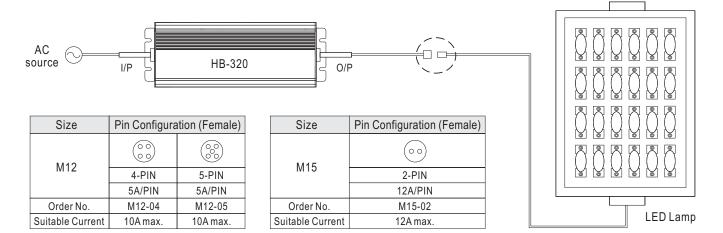

#### O Cable Joiner

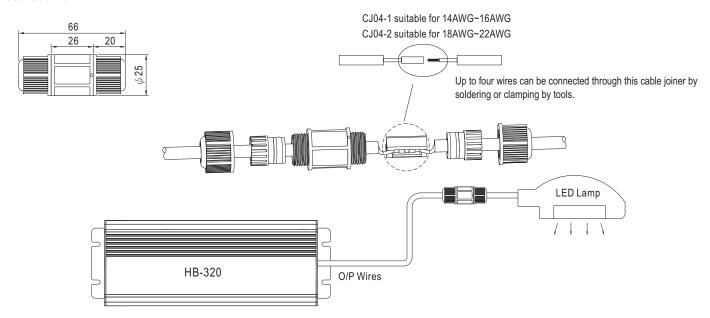

XCJ04 cable joiner can be purchased independently for user's own assembly.

