
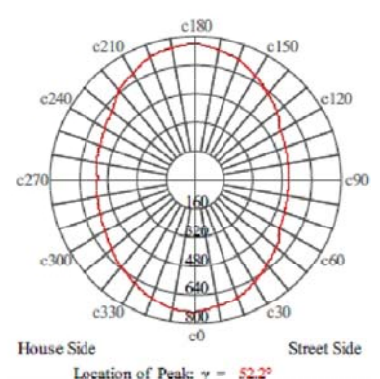
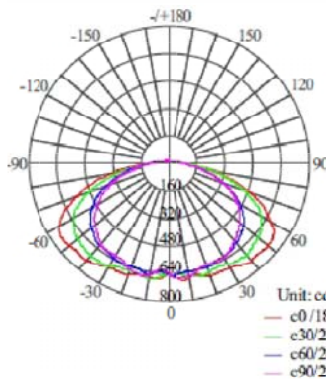
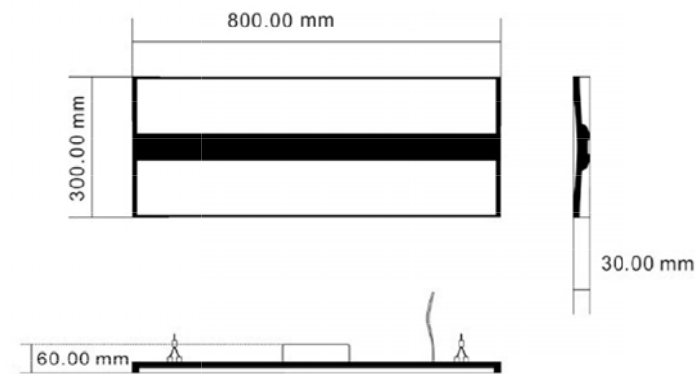


LED PANEL

Model 40W/48W

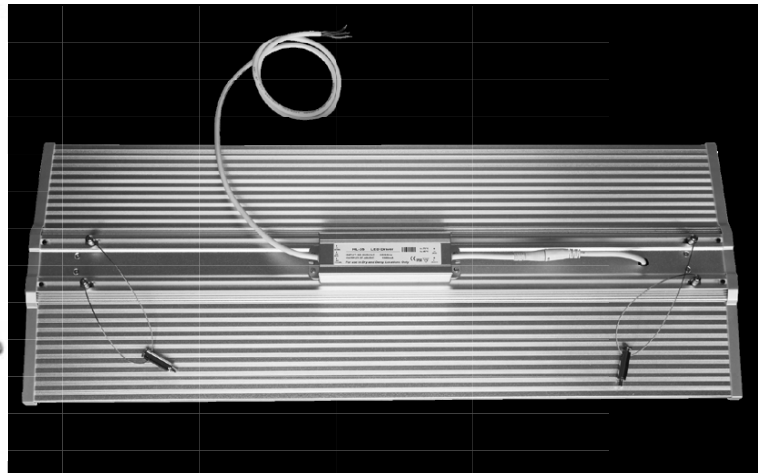

300x800 Product Size: L800xW300xH30mm

Light Distribution Crues

Conical Intensity

Key Features

- Unique elegant design and stylish angel wings appearance, dimming by both wall rotary dimmer & remote dimmer
- Special circuit design, each group of LEDs can work separately, avoiding any problem of lighting output caused by single faulty LED.
- Imported LGP (6MM), the light guide light rate is 80% above, SMD 3014, LED chip: Epistar
- Pure aluminum frame, bright silver processing, good heat dissipation, high-grade appearance
- Isolation constant current power supply, input voltage: AC85-265V DC30-40V, security better

Specification(40W):

1. Input Voltage: 85-265VAC, 50/60Hz
2. Dimension: 800x300x30mm
3. Power factor: >0.95
4. CRI >80
5. Power: 40W
6. Lumen: 2500-2800lm
7. CCT: WW: 2800-3500K, DL: 4000-4500K, PW: 6000-6500K, CW: 6500-7500K
8. Luminous Efficiency: >70lm/w
9. Led type: SMD3014 384pcs
10. Beam angle: 120degrees
11. Power factor: >0.96
12. IP grade: IP43
13. Working Temperature: -20°C ~ +40°C
14. Storage Temperature: -40°C ~ +80°C

Specification(48W):

1. Input Voltage: 85-265VAC, 50/60Hz
2. Dimension: 800x300x30mm
3. Power factor: >0.95
4. CRI >80
5. Power: 48W
6. Lumen: 3500-4000lm
7. CCT: WW: 2800-3500K, DL: 4000-4500K, PW: 6000-6500K, CW: 6500-7500K
8. Luminous Efficiency: >70lm/w
9. Led type: SMD3014 480pcs
10. Beam angle: 120degrees
11. Power factor: >0.96
12. IP grade: IP43
13. Working Temperature: -20°C ~ +40°C
14. Storage Temperature: -40°C ~ +80°C