

Led & Led

Leader in Led solutions

SPECIFICATION



Why choose LED DOMO PRO ARMATUR S?

- ▶ Own complete production lines to ensure the best quality and cost control
- ▶ Complete patent design in housing, end cap and construction
- ▶ 220 degree light-emitting view angle
- ▶ Low constant current to drive the LED to ensure the long lifespan and low light decay
- ▶ 3 years warranty
- ▶ Maximum 15 pcs can be connected in series






Led & Led
Leader in Led solutions

Data Sheet

Product Name	DOMO PRO ARMATUR S	
Item code	PS65-25	
Dimension	600*91*74mm	
Housing	AL housing+PC cover+AL board	
LED Type	SMD 2835	
LED Qty	PCS	144
CRI	Ra	70-85
Luminous Flux (LM)	Striped	2500-2700
	Frosted	2400-2600
Luminous Intensity (LUX) (5000-5500K)	1M	840-880
	2M	200-220
	3M	90-100
Luminous Efficiency	LM/W	95-110
Input Voltage (AC)	V	AC100-240
Working Voltage(DC)	V	DC36-42
Driving Current	mA	600
Power Factor	PF	>0.95
Viewing Angle	Degree	120
Ambient Temp	☒	-20~+45
Humidity	<95%	
Waterproof	/	IP65
Warranty	year	3
Color Temp (K)	3000-6500K	
Package	Carton Size: 680*260*300mm 6PCS/carton Weight: 10Kg	




Optical Parameter

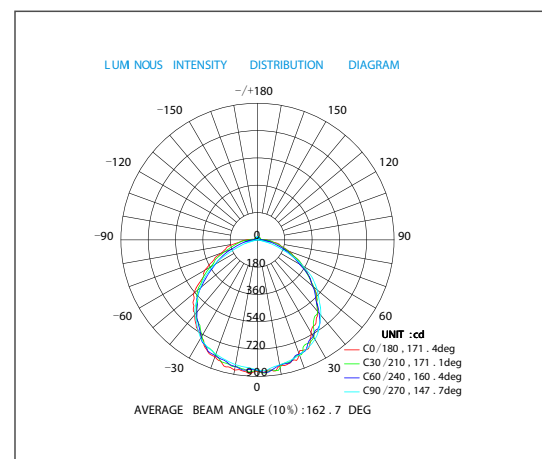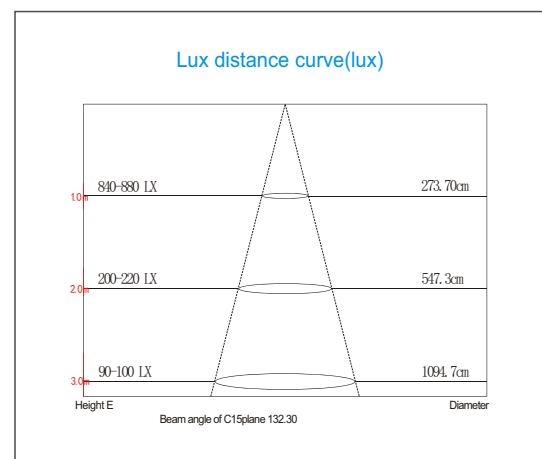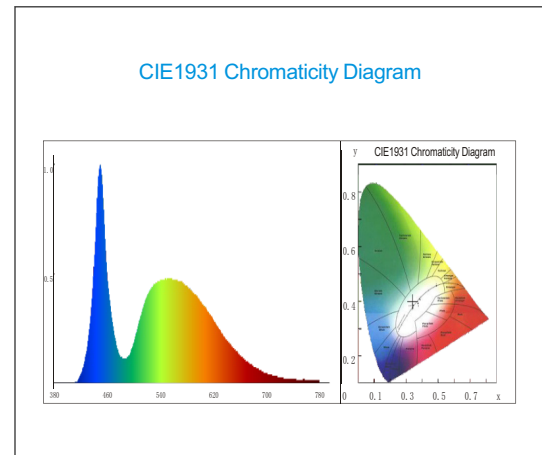

Data Sheet

Product Name	DOMO PRO ARMATUR S	
Item code	PS65-40	
Dimension	1200*91*74 mm	
Housing	AL housing+PC cover+AL board	
LED Type	SMD 2835	
LED Qty	PCS	240
CRI	Ra	70-85
Luminous Flux (LM)	Striped	4000-4400
	Frosted	3800-4200
Luminous Intensity (LUX) (5000-5500K)	1M	1330-1400
	2M	330-350
	3M	147-160
Luminous Efficiency	LM/W	95-110
Input Voltage (AC)	V	AC100-240
Working Voltage(DC)	V	DC36-42
Driving Current	mA	960
Power Factor	PF	>0.95
Viewing Angle	Degree	120
Ambient Temp	☒	-20~+45
Humidity	<95%	
Waterproof	/	IP65
Warranty	year	3
Color Temp (K)	3000-6500K	
Package	Carton Size: 1280*260*300mm 6PCS/carton Weight:16Kg	




Optical Parameter

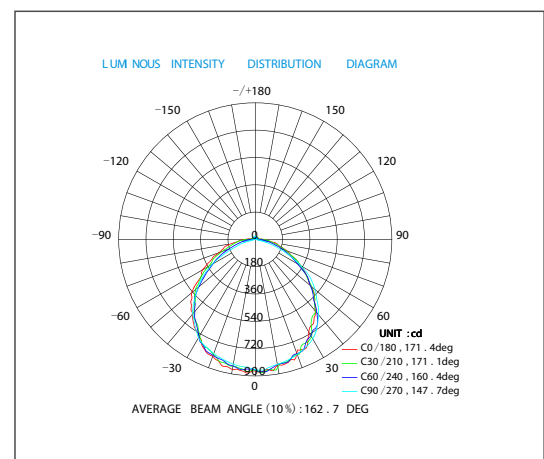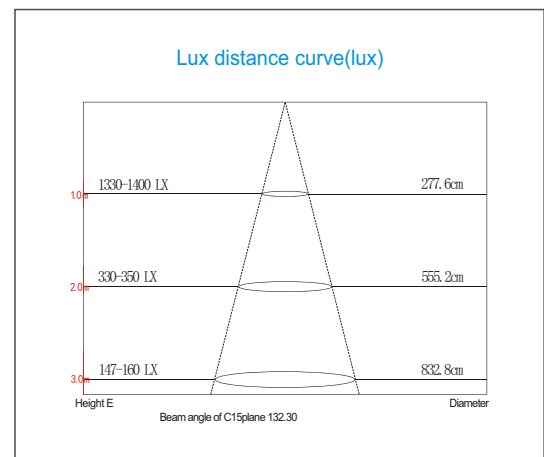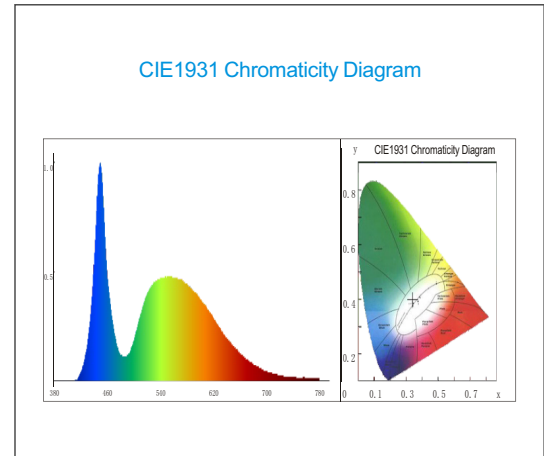

Data Sheet


Product Name	DOMO PRO ARMATUR S	
Item code	PS65-50	
Dimension	1500*91*74 mm	
Housing	AL housing+PC cover+AL board	
LED Type	SMD 2835	
LED Qty	PCS	288
CRI	Ra	70-85
Luminous Flux (LM)	Striped	4800-5200
	Frosted	4700-5000
Luminous Intensity (LUX) (5000-5500K)	1M	1760-1900
	2M	440-470
	3M	200-210
Luminous Efficiency	LM/W	95-110
Input Voltage (AC)	V	AC100-240
Working Voltage(DC)	V	DC36-42
Driving Current	mA	1200
Power Factor	PF	>0.95
Viewing Angle	Degree	120
Ambient Temp	☒	-20~+45
Humidity	<95%	
Waterproof	/	IP65
Warranty	year	3
Color Temp (K)	3000-6500K	
Package	Carton Size: 1580*260*300mm 6PCS/carton Weight:20Kg	

Optical Parameter

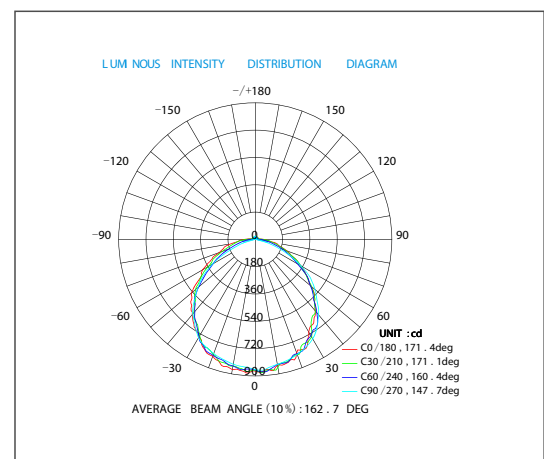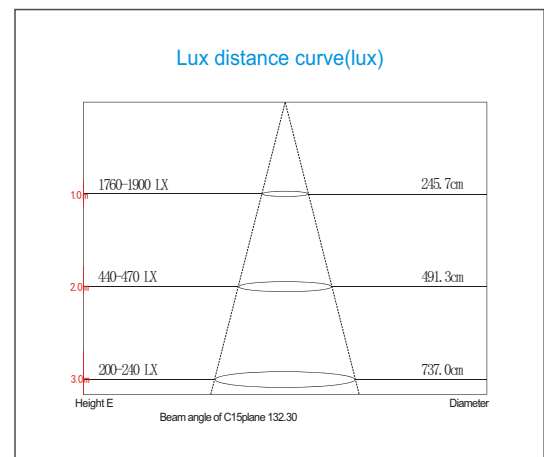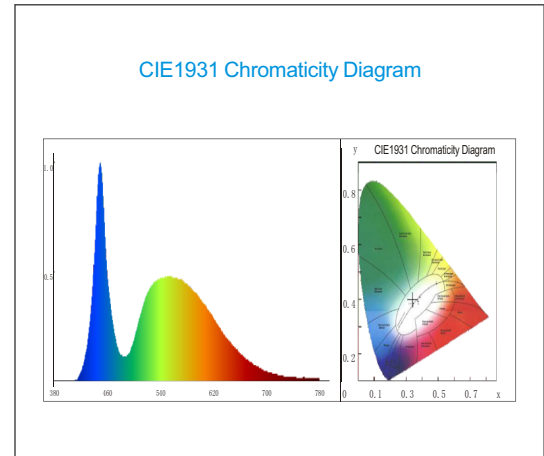

Dimension

DOMO PRO ARMATUR S

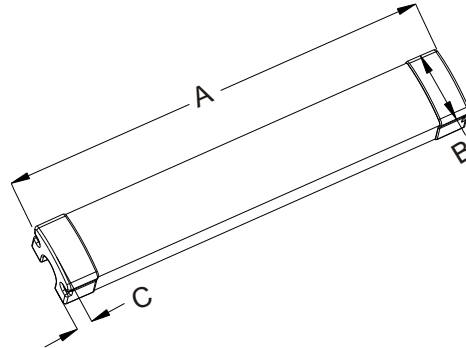

length	A		B		C
	Min.mm	Min.mm	Max.mm	Max.mm	Min.mm
600	600	91	92		74
1200	1200	91	92		74
1500	1500	91	92		74

Installation

