



# SPECIFICATION

T5 Integrated LED Tube

### Features

- CE RoHs certified
- Integrated structure with build-in driver, aluminum housing + PC housing
- High efficiency 100~110lm/w
- Easy installation and replacement, able to be connected into series
- 3 years warranty

### Temperature

Operating: -20 ~ +50°C

Storage: -40 ~ +85°C


### Application

- Offices
- libraries
- shops / The mall
- factories
- subway
- The hotel





## Dimension

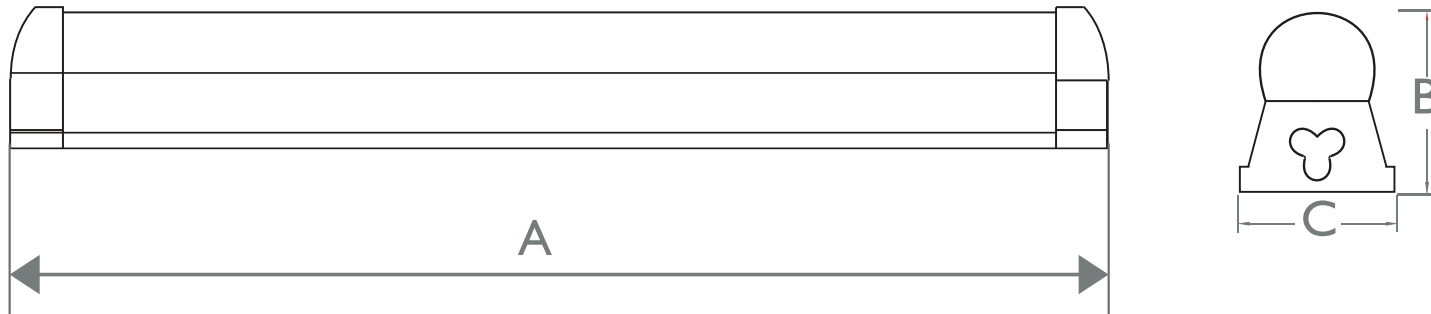

length	A	B	C
———	Min.mm	Min.mm	Max.mm
600	568.8	36.5	37.5
900	868.8	36.5	37.5
1200	1168.8	36.5	37.5
1500	1468.8	36.5	37.5


## Data Sheet

Article Number	Size	Power	LEDs	Beam Angle	CRI	AC Input	DC Output	SDCM	Efficiency (±5%)	Lumen Output
T5X-SMD2835-10-6	600mm	10W	54	120°	>80	100~240V/100~277V	50 ~60V	<4	95~105lm/w	900~1000lm
T5X-SMD2835-15-9	900mm	15W	72	120°	>80	100~240V/100~277V	70 ~80V	<4	100~110lm/w	1400~1600lm
T5X-SMD2835-20-12	1200mm	20W	120	120°	>80	100~240V/100~277V	70 ~80V	<4	100~110lm/w	1900~2100lm
T5X-SMD2835-25-15	1500mm	25W	144	120°	>80	100~240V/100~277V	70 ~80V	<4	100~110lm/w	2400~2600lm

Different wattage can be customized

# Package

Item code	Carton Size	N.W.(kg)/PC	G.W.(kg)/PC	Maximum Loading of		
				20'GP	40'GP	40'HQ
T5X-SMD2835-10-6	680*510*200	10	17	413CTNs	857CTNs	1202CTNs
T5X-SMD2835-15-9	980*510*200	13	23	288CTNs	618CTNs	670CTNs
T5X-SMD2835-20-12	1280*510*200	20	30	225CTNs	473CTNs	533CTNs
T5X-SMD5730-25-15	1580*510*200	21.5	35	187CTNs	391CTNs	432CTNs

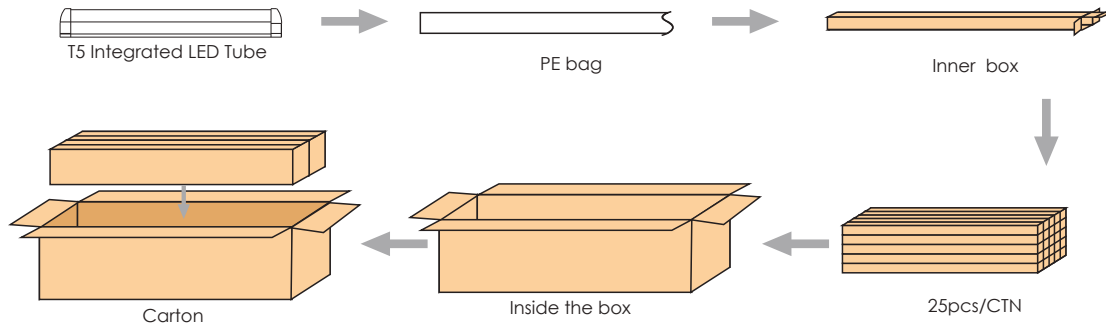

All the above information is subject to the final interpretation of LED Light Scandinavia AB.