

# Led & Led

## SPECIFICATION

FLUOLED DOMO PRO IP68



### Application

- Parking place
- Tunnel / Corridor / Gallery
- Railway / Bus / MTR Station
- Warehouse / Factory
- Chicken Sheds
- Agriculture
- Livestock
- Gas station / Car Washing

### Features

- Unique cylinder design, TUV-GS, UL, DLC, CE, RoHs certified
- Protection degree: IP68 IK09
- PC material – UV resistance, high impact resistance,
- PMMA material – Ammonia resistance, corrosion resistance
- 100lm/w or 130lm/w efficiency optional
- Capable with emergency, 0~10V dimming, DALI dimming, Meanwell version
- L80B50(Ta=25°C ): 70,000hrs
- 3 years warranty

### Temperature

Operating: -20 ~ + 50°C



Storage: -40 ~ + 85°C



## Product Details




## Dimension

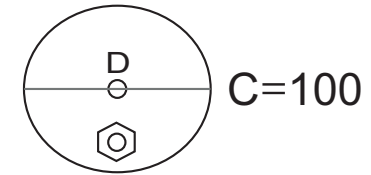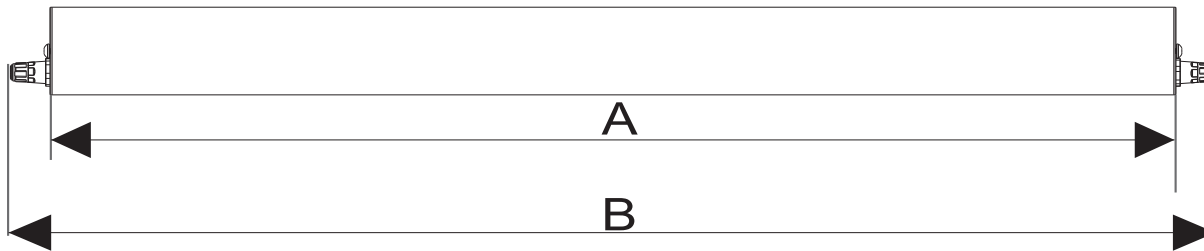

length	A		B		C
	Min.mm	Min.mm	Max.mm	Min.mm	
600	610	700	701	100	
1200	1217	1307	1308	100	
1500	1517	1607	1608	100	

# Installation

## ① Ceiling Mounted Installation

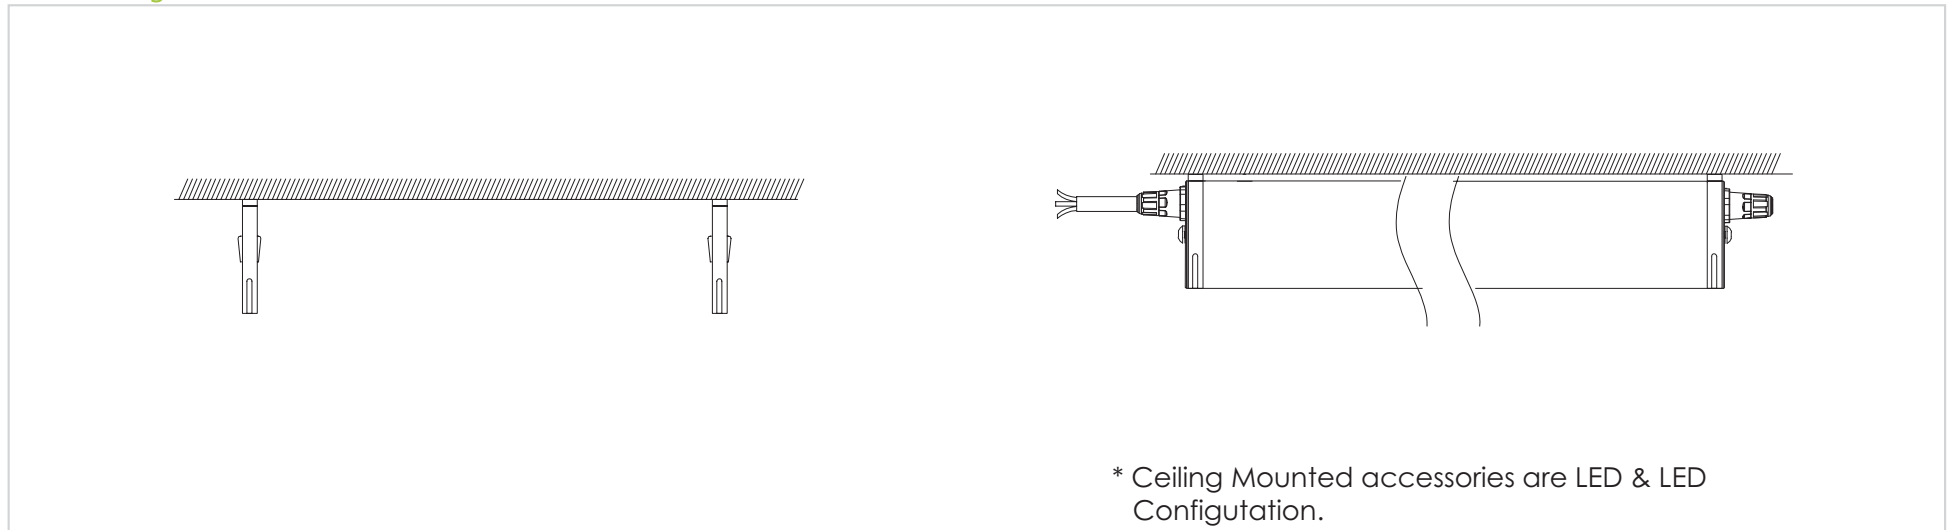

## ② Hanging Installation

