


PICTURE OF REAL PRODUCTS



DIMENSION (MM)

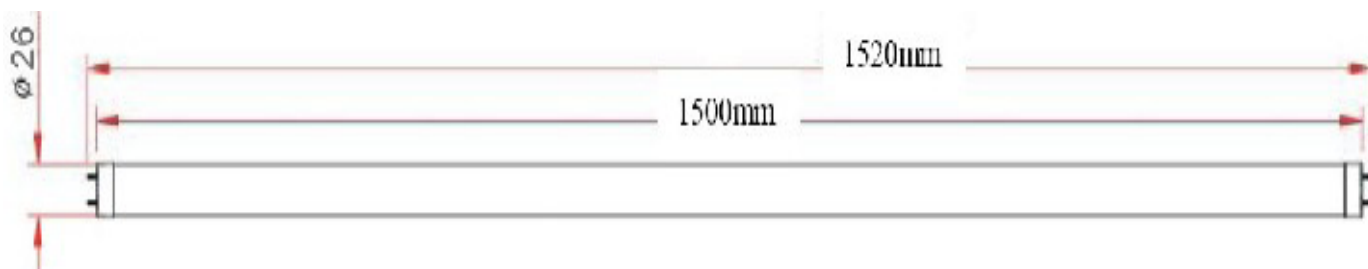

●FEATURES

ITEM	PARAMETER RANGE
OUTPUT POWER	25W
(PF)	$\geq 85\%$
LED AMOUNT SMD 3528	396PCS
LIGHT COLOR	WHITE
CCT LUMINOUS FLUX	6000K-6500K $\geq 2100\text{LM}$
(RA)	$\geq 75\%$
LIFESPAN	≥ 40000 HOURS
IRRITATION ANGLE	120°
MATERIAL	ALUMINIUM , PC
NET WEIGHT	0.44KG
GROSS WEIGHT	2.54KG
PACKING DIMENSION	1510*175*110MM
PACKING SPECIFICATIONS	6PCS/1PT

●TECHNICAL REQUEST		
ITEM	UNITS	PARAMETER RANGE
WORKING ENVIRONMENT	□	-37 ⁰ C - 55 ⁰ C
WORKING HUMIDITY		≤95%
STORAGE CONDITION	□	-40□~80□
INPUT VOLTAGE	V	AC220V/AC110V 50HZ/60HZ
INPUT CURRENT	A	0.11A
DEFEND GRADE	IP20 CLASS1	

●LED PARAMETER				
MODEL	CHIPS	LED LUMEN	LEDVOLTAGE	LED BEAM ANGLE
FLUOLED 150 SMD	17UM	≥6LM	3.0-3.3V	120°