

Ø100 mm LED Traffic Lights Model No.: TP100x3D



Product Features

Novel design with beautiful appearance
Low power consumption
High efficiency and brightness
Large viewing angle
Long lifespan: 100 000 hours
Multi-layer sealed and waterproof

Visual distance: ≥ 300 m
Housing: Aluminum, Alloy steel, Polycarbonate
Sun visor: Aluminum / Alloy steel
Exclusive optical lens and good color uniformity

Long viewing distance
Wide temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
CE, IP55, ITE Standard, RoHS, TUV, UL, EMC, LVD, WEEE, Swedish standard SS-EN 12368:2006

Technical Parameters:

Article Number	Color	LED Qty	Light Intensity	Wave Length	Viewing Angle L/R	Viewing Angle U/D	Power	Working Voltage	Housing Material
TP100x3D	Red	31	$\leq 110\text{cd}$	$625 \pm 5 \text{ nm}$	30°	30°	5W	11-30VDC/VAC 85V-265VAC, 50/60HZ	Aluminum, Alloy steel, PC, UV resistant
	Yellow		$\leq 110\text{cd}$	$590 \pm 2 \text{ nm}$					
	Green		$\leq 160\text{cd}$	$505 \pm 2 \text{ nm}$					


Packing Info:

Carton Size	QTY	GW	NW	Wrapper	Volume (m3)
0,63 * 0,22 * 0,24 m	1 pcs /carton box	3,5 kg	3,0 kg	K=K carton	0,03

Packing List:

Name	Light	Arm Bracket	Sun Visor	M12x60 Screw	Terminal Cover & Terminal Cover Gasket	Using Manual
Qty. (pcs)	3	2	3	4	1	1

Installation Sketch:

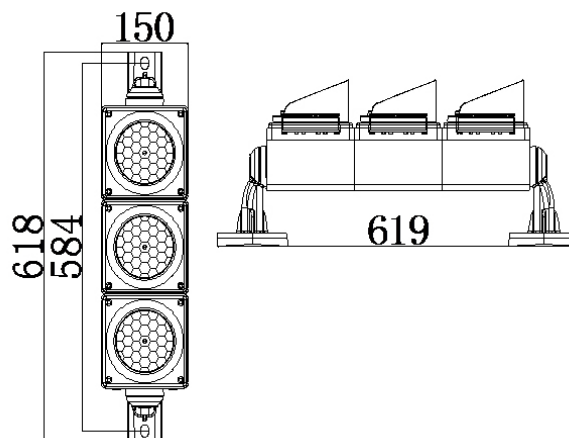

Address
LED Light Scandinavia AB
Lerklockan 8
739 93 Riddarhyttan
Sweden
Phone
+46 (0)73-679 35 50

Company headquarters
Riddarhyttan
Bank
Handelsbanken
IBAN
SE09 6000 0000 0008 0664 0448
BIC
HANDSESS

Bankgiro
548-7319
Organization no
556968-1157
VAT number
SE556968115701
Holds F-tax certificate

Internet
www.ledochled.se
E-mail
info@ledochled.se
Terms & delivery conditions
www.ledochled.se/villkor