

Ø300 mm LED Traffic Lights Model No.: TP300x3AD



Product Features

Novel design with beautiful appearance
Low power consumption
High efficiency and brightness
Large viewing angle
Long lifespan: 80 000 hours
Multi-layer sealed and waterproof

Visual distance: $\geq 600\text{m}$
Housing: Aluminum, Alloy steel,
Polycarbonate
Sun visor: Aluminum / Alloy steel
Exclusive optical lens and good
color uniformity

Long viewing distance
Wide temperature: $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$
CE, IP55, ITE Standard, RoHS,
TUV, UL, EMC, LVD, WEEE,
Swedish standard SS-EN 12368:2006

Technical Parameters:

Article Number	Color	LED Qty	Light Intensity	Wave Length	Viewing Angle L/R	Viewing Angle U/D	Power	Working Voltage	Housing Material
TP300x3AD	Red	91	$\leq 950\text{cd}$	$625\pm 5\text{ nm}$	30°	30°	9W	11-30VDC/VAC 85V-265VAC, 50/60HZ	Aluminum, Alloy steel, PC, UV resistant
	Yellow		$\leq 950\text{cd}$	$590\pm 2\text{ nm}$					
	Green		$\leq 1050\text{cd}$	$505\pm 2\text{ nm}$					


Packing Info:

Carton Size	QTY	GW	NW	Wrapper	Volume (m3)
1,21 * 0,42 * 0,21 m	1 pcs /carton box	14 kg	12 kg	K=K carton	0,1

Packing List:

Name	Light	L Bracket	Sun Visor	M4x8 Screw	M4x8 Screw with gasket	Terminal Cover & Terminal Cover Gasket	Using Manual
Qty. (pcs)	3	2	3	32	8	1	1

Installation Sketch:

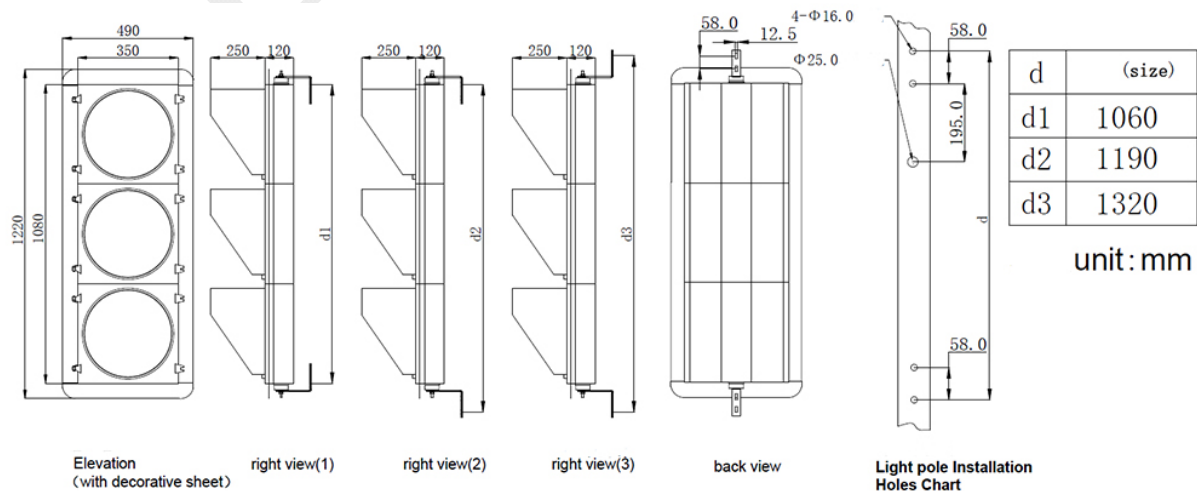

Address
LED Light Scandinavia AB
Lerklockan 8
739 93 Riddarhyttan
Sweden
Phone
+46 (0)73-679 35 50

Company headquarters
Riddarhyttan
Bank
Handelsbanken
IBAN
SE09 6000 0000 0008 0664 0448
BIC
HANDSESS

Bankgiro
548-7319
Organization no
556968-1157
VAT number
SE556968115701
Holds F-tax certificate

Internet
www.ledochled.se
E-mail
info@ledochled.se
Terms & delivery conditions
www.ledochled.se/villkor