


SPECIFICATION

LED DOMO Armatur High Bay



Dimension

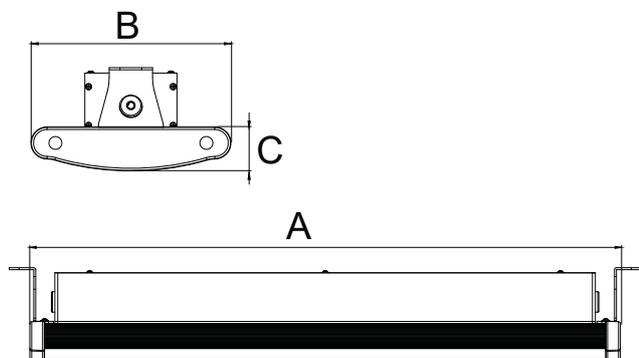

length	A length(mm)	B width(mm)	C height(mm)
600	602	184.5	96
900	902	184.5	96
1200	1202	184.5	96

Features

- 0-10V Dimmable available
- Ultra Bright, 150lm/w
- 110° Beam Angle
- Up to 18,750 Lumens
- 2', 3', and 4' Lengths
- 3-Year Manufacturer's Limited Warranty



Data sheet

	Size	Power	LEDs	Beam Angle	CRI	AC Input	DC Output	Efficiency(±5%)	Lumen Output
With striped cover									
	602*184.5*96	80W	650	110°	>80	200-240V	30-40V	140-150lm/w	11200-12000lm
	902*184.5*96	100W	780	110°	>80	200-240V	30-40V	140-150lm/w	14000-15000lm
	1202*184.5*96	150W	1040	110°	>80	200-240V	30-40V	140-150lm/w	21000-22500lm
With frosted cover									
	602*184.5*96	80W	650	110°	>80	200-240V	30-40V	120-130lm/w	9600-10400lm
	902*184.5*96	100W	780	110°	>80	200-240V	30-40V	120-130lm/w	12000-13000lm
	1202*184.5*96	150W	1040	110°	>80	200-240V	30-40V	120-130lm/w	18000-19500lm

Wall concealed laying

