

300mm LED Traffic Lights Model No.: TP300x1XP



Product Features

Novel design with beautiful appearance
Low power consumption
High efficiency and brightness
Large viewing angle
Long lifespan: 80 000 hours
Multi-layer sealed and waterproof

Visual distance: $\geq 600\text{m}$
Housing: Polycarbonate
Exclusive optical lens and good color uniformity
Long viewing distance
Wide temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$

Sun visor: Polycarbonate
Target board: Aluminum
CE, IP55, ITE Standard, RoHS,
TUV, UL, EMC, LVD, WEEE,
Svensk standard SS-EN 12368:2006

Technical Parameters:

| Article Number | Color | LED Qty | Light Intensity | Wave Length | Viewing Angle L/R | Viewing Angle U/D | Power | Working Voltage | Housing Material |
|----------------|-------------|---------|---------------------|------------------------|-------------------|-------------------|-------|--|------------------|
| TP200x1XP | Red X | 105 | $\leq 800\text{cd}$ | $625 \pm 5 \text{ nm}$ | 30° | 30° | 7W | 11-30VDC/VAC 85V-265VAC, 50/60HZ | PC, UV resistant |
| | Green Arrow | 65 | $\leq 800\text{cd}$ | $505 \pm 2 \text{ nm}$ | | | 6W | | |


Packing Info:

| Carton Size | QTY | GW | NW | Wrapper | Volume (m3) |
|----------------------|-------------------|--------|--------|------------|-------------|
| 0,52 * 0,42 * 0,22 m | 1 pcs /carton box | 3,3 kg | 4,5 kg | K=K carton | 0,048 |

Packing List:

| Name | Light | L Bracket | Sun Visor | M4*10 Screw | M4*20 Screw | Terminal Cover & Terminal Cover Gasket | Using Manual |
|------------|-------|-----------|-----------|-------------|-------------|--|--------------|
| Qty. (pcs) | 1 | 2 | 1 | 4 | 4 | 1 | 1 |

Installation Sketch:

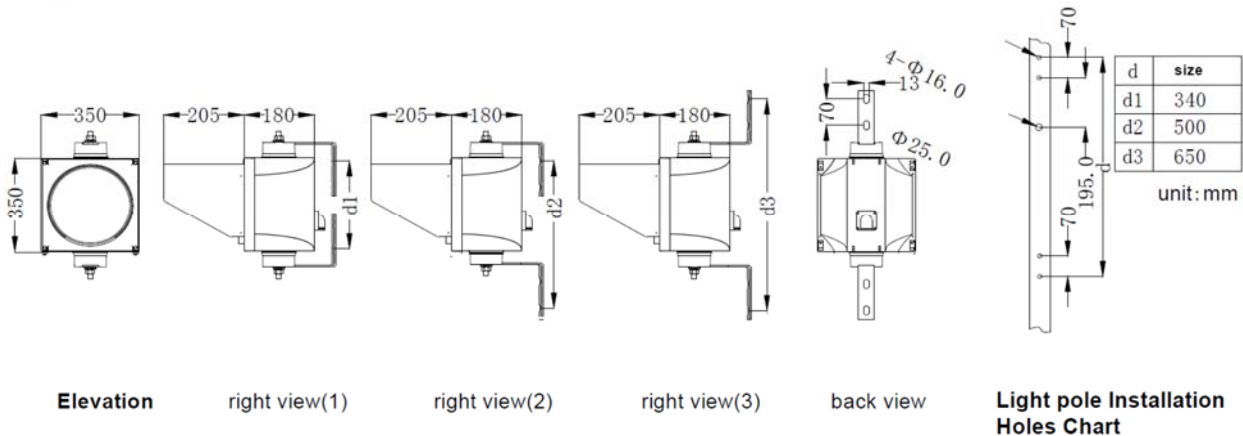

Address
LED Light Scandinavia AB
Lerklockan 8
739 93 Riddarhyttan
Sweden
Phone
+46 (0)73-679 35 50

Company headquarters
Riddarhyttan
Bank
Handelsbanken
IBAN
SE09 6000 0000 0008 0664 0448
BIC
HANDSESS

Bankgiro
548-7319
Organization no
556968-1157
VAT number
SE556968115701
Holds F-tax certificate

Internet
www.ledochled.se
E-mail
info@ledochled.se
Terms & delivery conditions
www.ledochled.se/villkor